


ELECTRIC FAIL-SAFE DEVICE

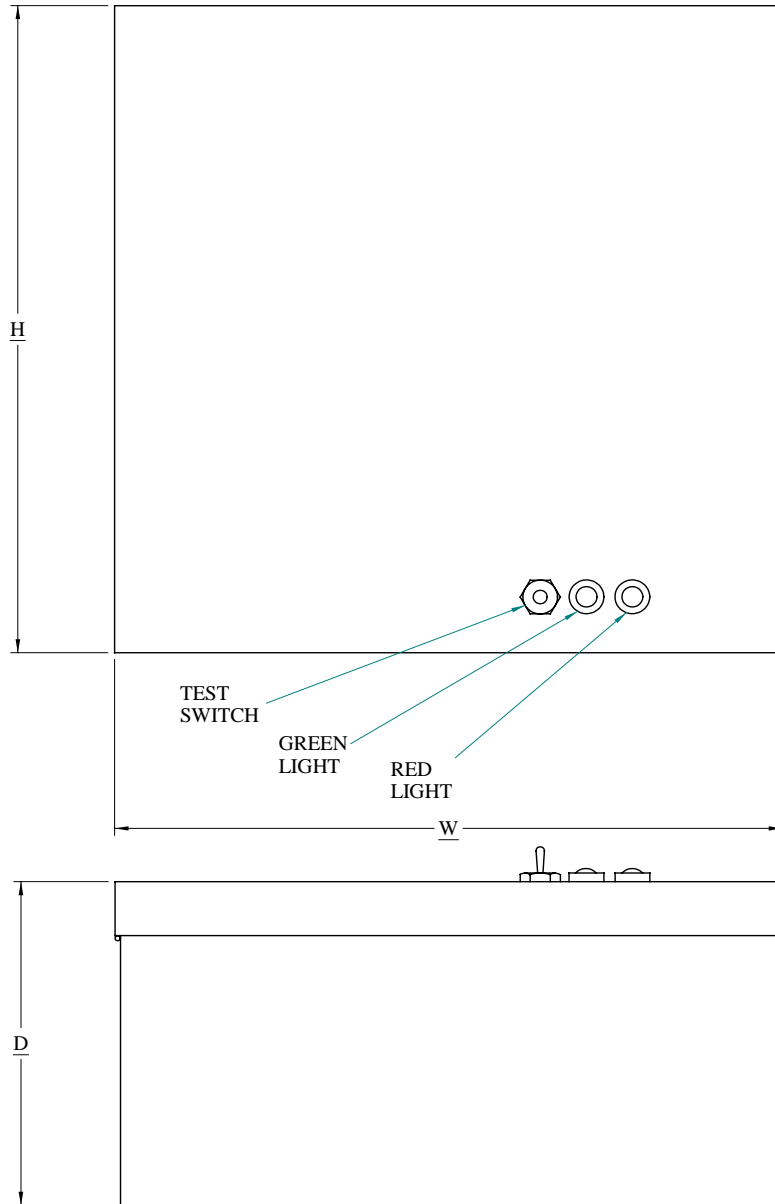

MODEL	MAX. CURRENT IN AMPS.	DIMENSIONS		
		H	W	D
322-120-1.0	1	12	12	6
322-120-1.5	1.5	12	12	6
322-120-3.0	3	14	12	6
322-120-7.0	7	20	20	8
322-120-10.0	10	30	24	12

Dimension in inches.

Dimensions based on NEMA 4 enclosures manufactured by Wiegmann, ICI reserves the right to substitute other manufacturers enclosure without notice, dimensions may vary.

Batteries are rechargeable lead-acid designed for long life (four to five years of dependable service life or between 200 and 1000 charge/discharge cycles depending on the depth of discharge). Higher current units (10 amp) use batteries that have a design life of ten years.

Standard Fail-safe enclosures are NEMA 4, consult factory for NEMA 7.

Temperature range 32° to 115° F.

WIRING NOTES:

T1 = NEUTRAL
 T2 = 120V-1PH SUPPLY
 T3 = NEUTRAL, OUTPUT
 T4 = 120V-1PH OUTPUT POWER
 T5 = 120V-1PH BACKUP POWER
 T6 = NOT USED

SEE WIRING SCAMATIC FOR DETAILS.

BACKUP POWER IS SQUARE SINE

ICI	Indelac Controls, Inc.	
	Florence, Ky. 41042	
OUTLINE DRAWING FOR 322 SERIES ELECTRIC FAIL-SAFE	8-8-04	JLR
	040808	